


AMERICAN STANDARD GEAR RACKS 美标齿条
SUITABLE FOR CONTINUOUS MOUNTING

According to AGMA grade 8-9

American standard racks from DP20 - DP3, pressure angle 14.5° / 20°

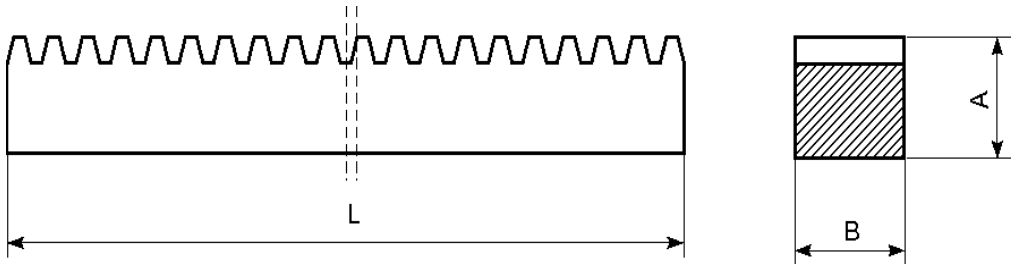

STANDARD SIZES EX STOCK (C45 STEEL)

DP	Pressure angle	A X B (inch)	Length (inches)	Wt. (LBS)
20	14.5° or 20°	3/8 X 3/8	49	1.60
20	14.5° or 20°	3/8 X 3/8	73	2.40
16	14.5° or 20°	1/2 X 1/2	49	2.80
16	14.5° or 20°	1/2 X 1/2	73	4.20
12	14.5° or 20°	3/4 X 1/2	49	4.40
12	14.5° or 20°	3/4 X 1/2	73	6.90
12	14.5° or 20°	3/4 X 3/4	49	6.60
12	14.5° or 20°	3/4 X 3/4	73	10.40
10	14.5° or 20°	1 X 5/8	49	7.50
10	14.5° or 20°	1 X 5/8	73	11.30
10	14.5° or 20°	1 X 1	49	12.00
10	14.5° or 20°	1 X 1	73	18.00
8	14.5° or 20°	1 1/4 X 3/4	49	10.60
8	14.5° or 20°	1 1/4 X 3/4	73	15.70
8	14.5° or 20°	1 1/4 X 1 1/4	49	17.60
8	14.5° or 20°	1 1/4 X 1 1/4	73	26.20
6	14.5° or 20°	1 1/2 X 1	49	17.50
6	14.5° or 20°	1 1/2 X 1	73	26.20
6	14.5° or 20°	1 1/2 X 1 1/2	49	26.40
6	14.5° or 20°	1 1/2 X 1 1/2	73	39.20
5	14.5° or 20°	1 3/4 X 1 1/4	49	24.30
5	14.5° or 20°	1 3/4 X 1 1/4	73	35.90
4	14.5° or 20°	2 X 1 1/2	49	35.60
4	14.5° or 20°	2 X 1 1/2	73	52.90
4	14.5° or 20°	2 X 2	49	47.40
4	14.5° or 20°	2 X 2	73	70.50
3	14.5° or 20°	3 X 1 1/2	49	47.40
3	14.5° or 20°	3 X 1 1/2	73	70.50