


Chain Coupling

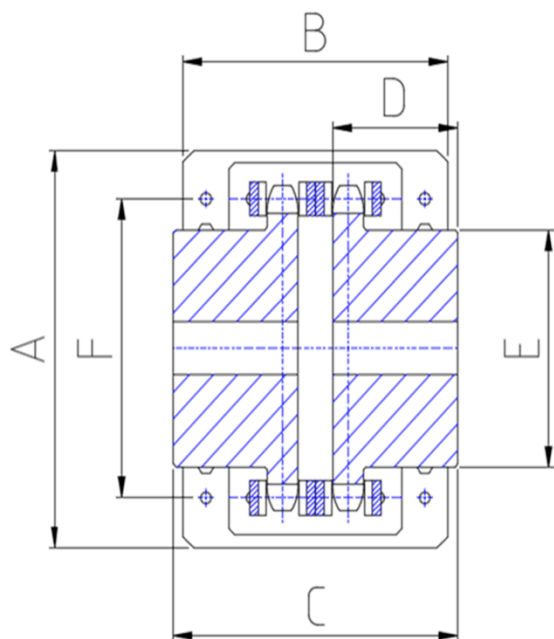

Coupling Size	Chain Size	Bore		Casing		Assembled width 'C'	Hub length 'D'	Hub diameter 'E'	Bolt centre 'F'	Torque rating Nm	Weight (kgs)
		Min	Max	Outside Diameter 'A'	Width 'B'						
3012	35-2	12	14	69	63	65	29.5	25	57	150	0.5
4012	40-2	12	14	77	72	79.4	36	31	61	210	1.0
4014	40-2	12	14	84	75	79.4	36	43	72	300	1.4
4016	40-2	13.5	16	92	72	87.4	40	50	77	380	1.8
5014	50-2	14.5	17	101	85	99.7	45	53	82	550	2.5
5016	50-2	14.5	18	110	87	99.7	45	60	92	725	3.2
5018	50-2	16	18	122	85	99.7	45	70	106	925	4.0
6018	60-2	20	22	147	105	123.5	56	85	122	1750	7.2
6020	60-2	20	24	158	105	123.5	56	98	132	2050	9.5
6022	60-2	20	28	168	117	123.5	56	110	145	2400	11.3
8018	80-2	20	32	190	129	141.2	63	110	160	3800	14.7
8020	80-2	20	36	210	137	145.2	65	120	184	4700	18.2
8022	80-2	20	40	226	137	157.2	71	140	196	5500	23.3
10020	100-2	25	45	281	153	178.8	80	160	250	8700	36.0
12018	120-2	35	50	307	181	202.7	90	170	280	13250	49.0
12022	120-2	35	56	357	181	222.7	100	210	335	17800	77.0